



Features

- Aluminum 6063, good heat radiation with long lifespan;
- Support 0~10V, PWM and Resistor dimming solution;
- High lighting efficiency, save energy;
- Long lifespan, ≥ 50000 hours;
- Light source adopts LM-80 certified LED;
- Adopt UL Class P certified power supply;
- No Blue Spike, No Blue Hazard, Ultra High CRI

Parameter

Size: 1230mm (4.04ft)x86mm (3.39")
 Beam Angle: 98° (PDM)
 Working Voltage: 100-277VAC/ 50-60Hz
 PF: >0.9
 Input Power: 45W
 CCT: 2835K, 3000K, 4000K, 6"00K
 CRI: 97+
 Lumen: 2500lm
 Dimming Range: 1-100%
 Operation Temperature: -20°C to +45°C
 Storage Temp: -40°C to +60°C
 Humidity: 40-75% RH
 RH: IP40
 Installation Way: Surface Installation, Pendant, Recessed
 Package Size: 1280mm (4.20ft)x145mm(0.48ft)x92mm(0.44ft)
 Gross Weight: 4.83Kg (10.6 lbs)





Size

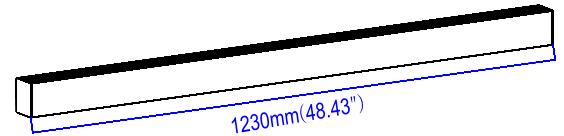



Standard color



Test report

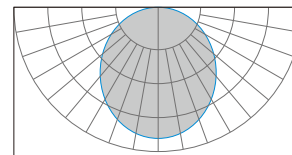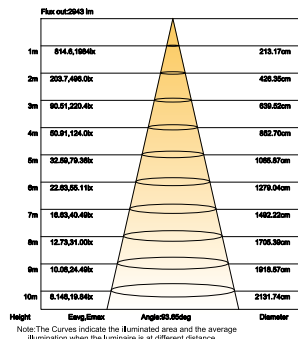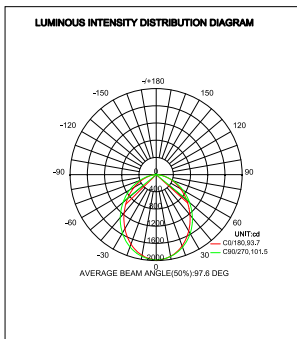

PDM

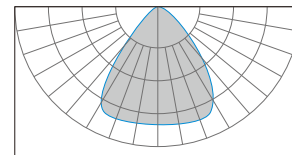


UGR < 19

Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance ±10%;

Optional accessories


Installation accessories



• Pendant

L-PTB-NPF

L-PTB-PF



• Ceiling mounted


L-SM

L-PTB-NPF: pendant wire + canopy without cable hole


L-PTB-PF: pendant wire + canopy with cable hole

L-SM: screw for ceiling mounted

Disassembly tool

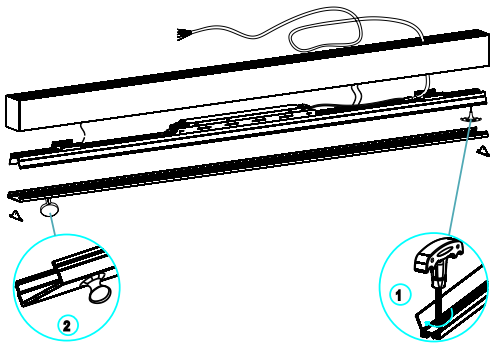

L-DA-D



L-DA-A

• Tool

L-DA-D: disassembly tool

L-DA-A: Rubber sucker